

GRIFCUT 501

Features & Benefits

- Suitable for mixed metal trimming
- Extended sump life
- No staining on metal surfaces
- Operator friendly
- Stable Emulsion

PRODUCT DESCRIPTION

GRIFCUT 501 is a synthetic lubricant specifically formulated with High Performance Lubricity Additives. It is designed for trimming applications on aluminum and zinc castings. It can also be used as a light stamping or drawing fluid.

TYPICAL CHARACTERISTICS


FORM: Liquid
 APPEARANCE: Slight Yellow
 ODOR: Mild
 FLASH POINT: N/A
 REFRACTOMETER FACTOR: 2.5
 pH (5%): 9.1 – 9.3
 SPECIFIC GRAVITY: 0.95

RECOMMENDED CONCENTRATION

Light Machining & Grinding	1 – 1.5%
Drawing or Stamping	10 – 20%



Refractometer Factor = 2.5

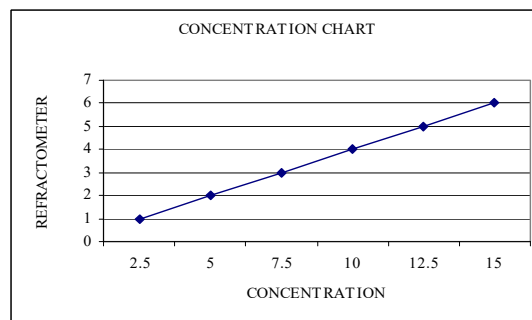

PACKAGING:

Totes
Drums

HEALTH & SAFETY

All reasonable care has been taken to ensure that the information contained in this publication is accurate as the date of printing, however, such information might change due to changes in the formulation blend occurring subsequent to the date of printing. The MSDS must be consulted for appropriate information regarding storage, safe handling and storage.

