

DILUCO™ 1000

Features & Benefits

- Excellent Release
- Superior Lubrication
- No Stain & Outstanding Cosmetics
- Low Build up

DILUCO™1000 is a high performance, water-based die release agent formulated specifically for aluminum die casting applications. This product contains a blend of synthetic lubricants, unique polymers and wetting agents that withstand thermal degradation at core and other high temperature areas of the die while providing excellent finish without overspray buildup.


Typical Properties:

- | | |
|--------------------|------------|
| • Form | Liquid |
| • Color | White |
| • Odor | Slight |
| • pH | 9.3 to 9.6 |
| • Specific Gravity | 0.98 |

Recommended Dilution Ratios

Aluminum 70:1 to 100:1

Optimal Operating Temperatures

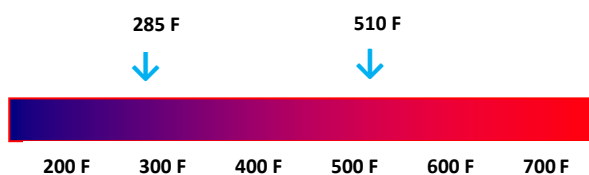

PACKAGING:
Pails

Health & Safety:

All reasonable care has been taken to ensure that the information contained in this publication is accurate as the date of printing, however, such information might change to due changes in the formulation blend occurring subsequent to the date of printing. The MSDS must be consulted for appropriate information regarding storage, safe handling and storage.

