

IRONGUARD WP-125

Typical Characteristics:

Appearance	Transparent Green
pH of a 2% solution	10.5 to 11.0 typical
Odor	Mild

PRODUCT DESCRIPTION:


IRONGUARD WP-125 is a solution of organic passivating material for use as an in-process or short-term rust preventative to provide indoor protection for ferrous and non-ferrous metals. The **IRONGUARD WP-125** is typically used at a concentration ranging from 3% to 8% by volume depending on the application. This product can be added to cleaner or water rinse to achieve corrosion protection or it can be used alone reduced with water

MIXING PROCEDURE:

Normal concentration range is 3 % to 8% by volume mixed with water or water-based cleaning solution.

APPLICATION:

For use in the final stage of spray washers, dip tanks, as a corrosion preventative in pressure test tanks, and many other uses. Temperatures can range from ambient to 165F.

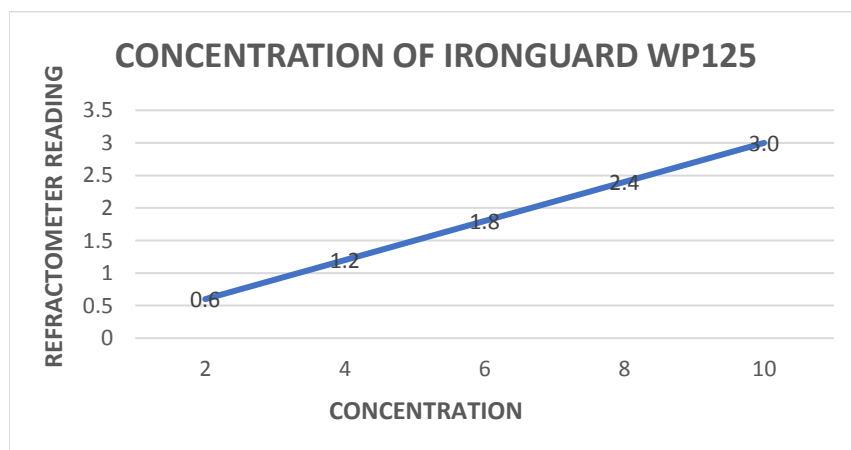

REFRACTIVE INDEX	2	4	6	8	10
CONCENTRATION	0.6	1.2	1.8	2.4	3.0



HEALTH & SAFETY

All reasonable care has been taken to ensure that the information contained in this publication is accurate as the date of printing, however, such information might change due to changes in the formulation blend occurring subsequent to the date of printing. The MSDS must be consulted for appropriate information regarding storage, safe handling and storage.